

Tolleranze secondo / tolerance according to / tolérance conformes aux ISO 9906:2012 grade 3B


4-6" 2850rpm - 8-12" 2900rpm

50 Hz - 2 POLI / POLES					m <sup>3</sup> /h	0	0,3	0,6	0,9	1,2	1,5	1,8	2,1	2,4	2,7	3,0	3,3	3,6	3,9	4,2	4,8	5,4	6,0	6,6	Ø (mm)	" G		
TIPO-TYPE	HP	kW	A 1~230	A 3~400	l/min	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	80	90	100	110				
					l/sec	0	0,08	0,17	0,25	0,33	0,42	0,50	0,58	0,67	0,75	0,83	0,92	1,00	1,08	1,17	1,33	1,50	1,67	1,83				
FP4 X005/12	0,5	0,37	3,6	1,8		85	80	72	61	44	18															98	1,1/4	
FP4 X007/18	0,75	0,55	4,6	2,0		128	120	107	91	66	26																98	1,1/4
FP4 X010/24	1	0,75	6,0	2,5		170	160	143	121	88	35																98	1,1/4
FP4 X015/36	1,5	1,1	8,4	3,4		255	240	215	182	131	53																98	1,1/4
FP4 X020/48	2	1,5	10,8	4,8		340	320	286	242	175	70																98	1,1/4
FP4 A005/09	0,5	0,37	3,6	1,8		60			56	50	43	35	26	15													98	1,1/4
FP4 A007/14	0,75	0,55	4,6	2,0		92			85	76	66	54	40	23													98	1,1/4
FP4 A010/19	1	0,75	6,0	2,5		122			112	101	86	71	53	30													98	1,1/4
FP4 A015/28	1,5	1,1	8,4	3,4		176			161	145	125	103	77	44													98	1,1/4
FP4 A020/38	2	1,5	10,8	4,8		231			212	191	164	135	101	58													98	1,1/4
FP4 A030/54	3	2,2	15,2	6,1		318			292	263	226	186	139	79													98	1,1/4
FP4 T005/08	0,5	0,37	3,6	1,8		55			51	48	44	39	33	26	18	8											98	1,1/4
FP4 T007/12	0,75	0,55	4,6	2,0		83			76	72	66	58	49	39	27	12											98	1,1/4
FP4 T010/16	1	0,75	6,0	2,5		110			101	96	88	78	66	52	36	16											98	1,1/4
FP4 T015/23	1,5	1,1	8,4	3,4		154			141	133	123	109	92	72	51	23											98	1,1/4
FP4 T020/32	2	1,5	10,8	4,8		214			197	186	171	151	128	101	70	32											98	1,1/4
FP4 T030/45	3	2,2	15,2	6,1		302			277	261	241	213	180	142	99	45											98	1,1/4
FP4 T040/60	4	3	20,4	7,1		402			369	348	321	284	240	189	132	60											98	1,1/4
FP4 B005/07	0,5	0,37	3,6	1,8		47			42	39	36	33	28	23	18	12											98	1,1/4
FP4 B007/11	0,75	0,55	4,6	2,0		74			66	62	57	52	45	37	28	18											98	1,1/4
FP4 B010/15	1	0,75	6,0	2,5		98			87	82	76	68	59	49	37	24											98	1,1/4
FP4 B015/22	1,5	1,1	8,4	3,4		140			125	118	109	98	85	70	54	35											98	1,1/4
FP4 B020/30	2	1,5	10,8	4,8		191			171	161	148	134	116	96	73	47											98	1,1/4
FP4 B030/42	3	2,2	15,2	6,1		273			244	229	212	191	166	137	104	67											98	1,1/4
FP4 B040/57	4	3	20,4	7,1		367			327	308	285	257	223	184	140	91											98	1,1/4
FP4 C005/06	0,5	0,37	3,6	1,8		41						37	35	33	30	27	24	20	16	12							98	1,1/4
FP4 C007/09	0,75	0,55	4,6	2,0		62						55	52	49	45	41	36	31	25	18							98	1,1/4
FP4 C010/12	1	0,75	6,0	2,5		80						72	68	64	59	53	47	40	32	23							98	1,1/4
FP4 C015/18	1,5	1,1	8,4	3,4		120						107	102	96	88	80	70	59	48	35							98	1,1/4
FP4 C020/24	2	1,5	10,8	4,8		160						143	136	128	118	106	93	79	64	47							98	1,1/4
FP4 C030/36	3	2,2	15,2	6,1		240						215	204	191	176	159	140	119	95	70							98	1,1/4
FP4 C040/48	4	3	20,4	7,1		320						286	272	255	235	212	186	158	127	94							98	1,1/4
FP4 C055/63	5,5	4	25,0	9,2		420						375	357	335	309	278	244	207	167	123							98	1,1/4
FP4 D005/05	0,5	0,37	3,6	1,8		33									28	27	25	23	21	19	13						98	1,1/4
FP4 D007/07	0,75	0,55	4,6	2,0		47									40	37	35	32	29	26	18						98	1,1/4
FP4 D010/10	1	0,75	6,0	2,5		67									57	54	50	46	42	37	26						98	1,1/4
FP4 D015/15	1,5	1,1	8,4	3,4		100									85	80	75	70	63	56	39						98	1,1/4
FP4 D020/20	2	1,5	10,8	4,8		130									110	104	97	90	81	72	50						98	1,1/4
FP4 D030/30	3	2,2	15,2	6,1		195									165	156	146	135	122	108	75						98	1,1/4
FP4 D040/40	4	3	20,4	7,1		260									220	208	195	180	162	144	100						98	1,1/4
FP4 D055/54	5,5	4	25,0	9,2		351									296	281	263	243	219	194	135						98	1,1/4
FP4 E005/04	0,5	0,37	3,6	1,8		28										25	24	23	22	20	17	14	10	6			98	1,1/4
FP4 E007/06	0,75	0,55	4,6	2,0		41										37	36	34	33	31	26	20	15	8			98	1,1/4
FP4 E010/08	1	0,75	6,0	2,5		55										49	48	46	44	41	34	27	19	11			98	1,1/4
FP4 E015/12	1,5	1,1	8,4	3,4		83										74	72	69	65	61	52	41	29	17			98	1,1/4
FP4 E020/16	2	1,5	10,8	4,8		111										99	95	92	87	82	69	54	39	22			98	1,1/4
FP4 E030/24	3	2,2	15,2	6,1		166										148	143	138	131	123	103	81	58	34			98	1,1/4
FP4 E040/32	4	3	20,4	7,1		221										197	191	183	174	164	138	108	78	45			98	1,1/4
FP4 E055/42	5,5	4	25,0	9,2		290										259	250	241	229	215	181	142	102	59			98	1,1/4
FP4 E075/57	7,5	5,5	-	12,3		402										358	347	333	317	297	251	197	141	81			98	1,1/4
FP4 E100/76	10	7,5	-	16,4		536										478	462	444	422	396	334	263	188	109			98	1,1/4
FP4 E125/95	12,5	9,3	-	21,4		670										597	578	555	528	495	418	328	235	136			98	1,1/4




Tolleranze secondo / tolerance according to / tolérance conformes aux ISO 9906:2012 grade 3B

2850rpm

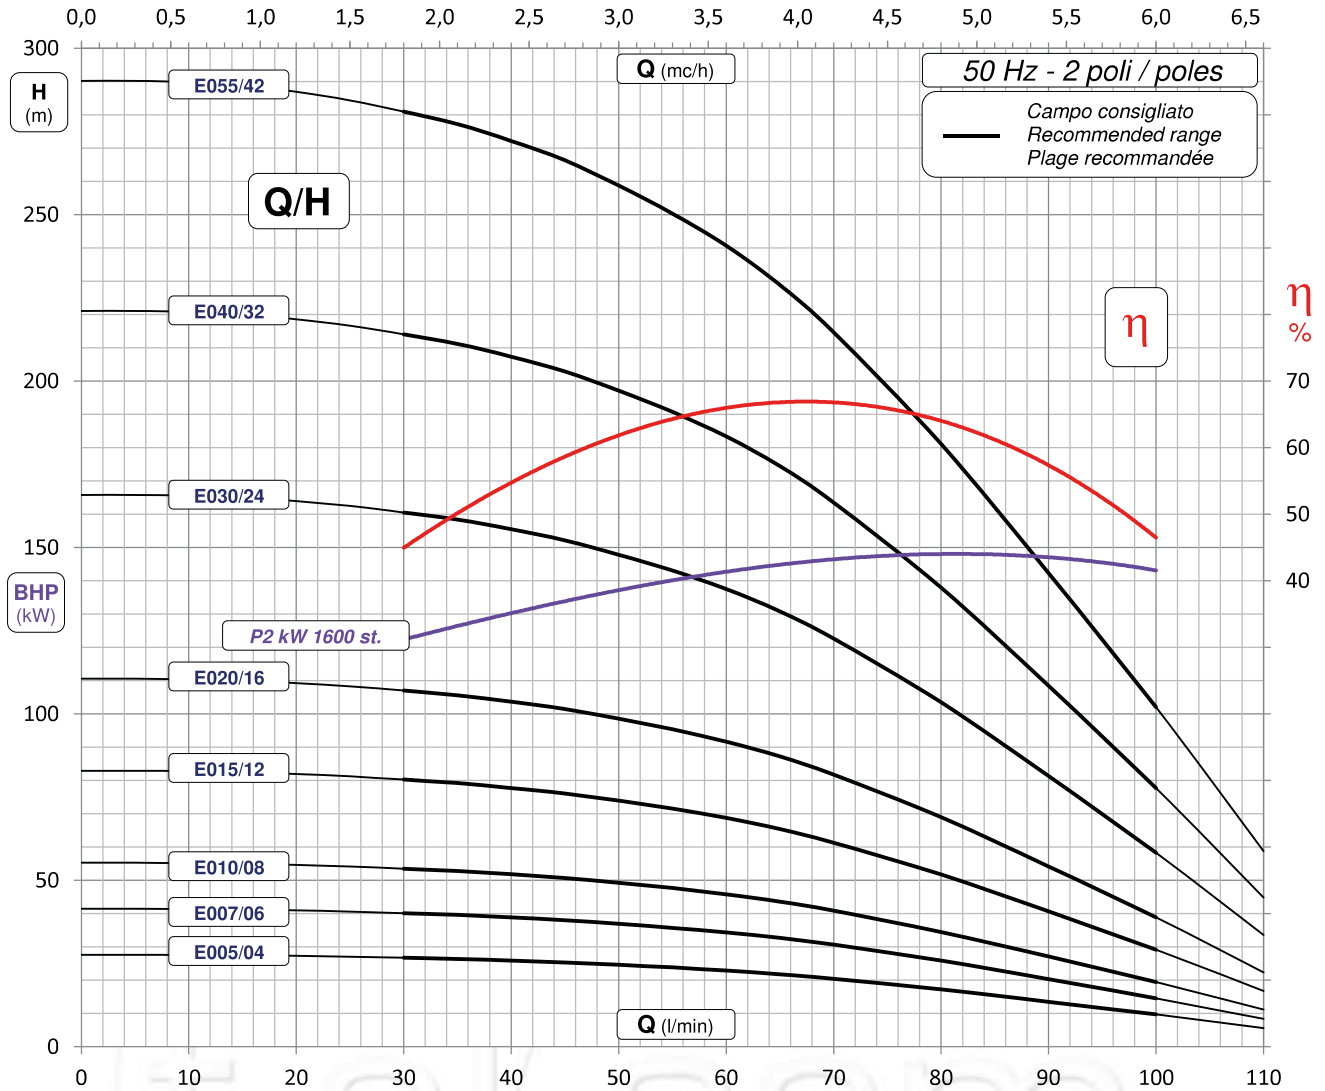


DATI OPERATIVI / OPERATING DATA / DONNEES D'EXPLOITATION														
TIPO / TYPE	P2		ST	L (mm)	Kg	N	con / with FMO4 M				con / with FMO4 T			
	HP	Kw					L1(mm)	Kg	A(230V)	P1(Kw)	L1(mm)	Kg	A(400V)	P1(Kw)
FP4 E005/04	0,5	0,37	4	225	2,3	62	535	8,8	3,6	0,71	535	8,8	1,8	0,65
FP4 E007/06	0,75	0,55	6	269	2,8	62	599	10,0	4,6	0,95	599	10,0	2,0	0,87
FP4 E010/08	1	0,75	8	313	3,2	62	668	11,7	6,0	1,21	668	11,7	2,5	1,19
FP4 E015/12	1,5	1,1	12	400	4,1	63	795	14,3	8,4	1,72	770	13,5	3,4	1,62
FP4 E020/16	2	1,5	16	488	4,9	63	923	16,6	10,8	2,27	883	15,1	4,8	2,11
FP4 E030/24	3	2,2	24	663	6,7	64	1.153	21,8	15,2	3,24	1.098	18,4	6,1	3,01
FP4 E040/32	4	3	32	874	8,8	66	1.379	25,8	20,4	4,17	1.324	21,0	7,1	4,05
FP4 E055/42	5,5	4	42	1.094	11,0	67	1.894	40,0	25,0	5,48	1.599	26,2	9,2	5,13

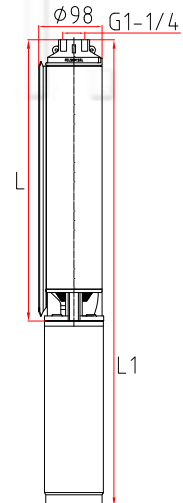


ST = stadi / stages / étages  
 N = spinta idraulica / hydraulic thrust / poussée hydraulique  
 P2= potenza nominale motore / motor nominal power / puissance nominale moteur  
 P1= potenza totale assorbita / total power consumption / consommation totale

Tolleranze secondo / tolerance according to / tolérance conformes aux ISO 9906:2012 grade 3B

2850rpm

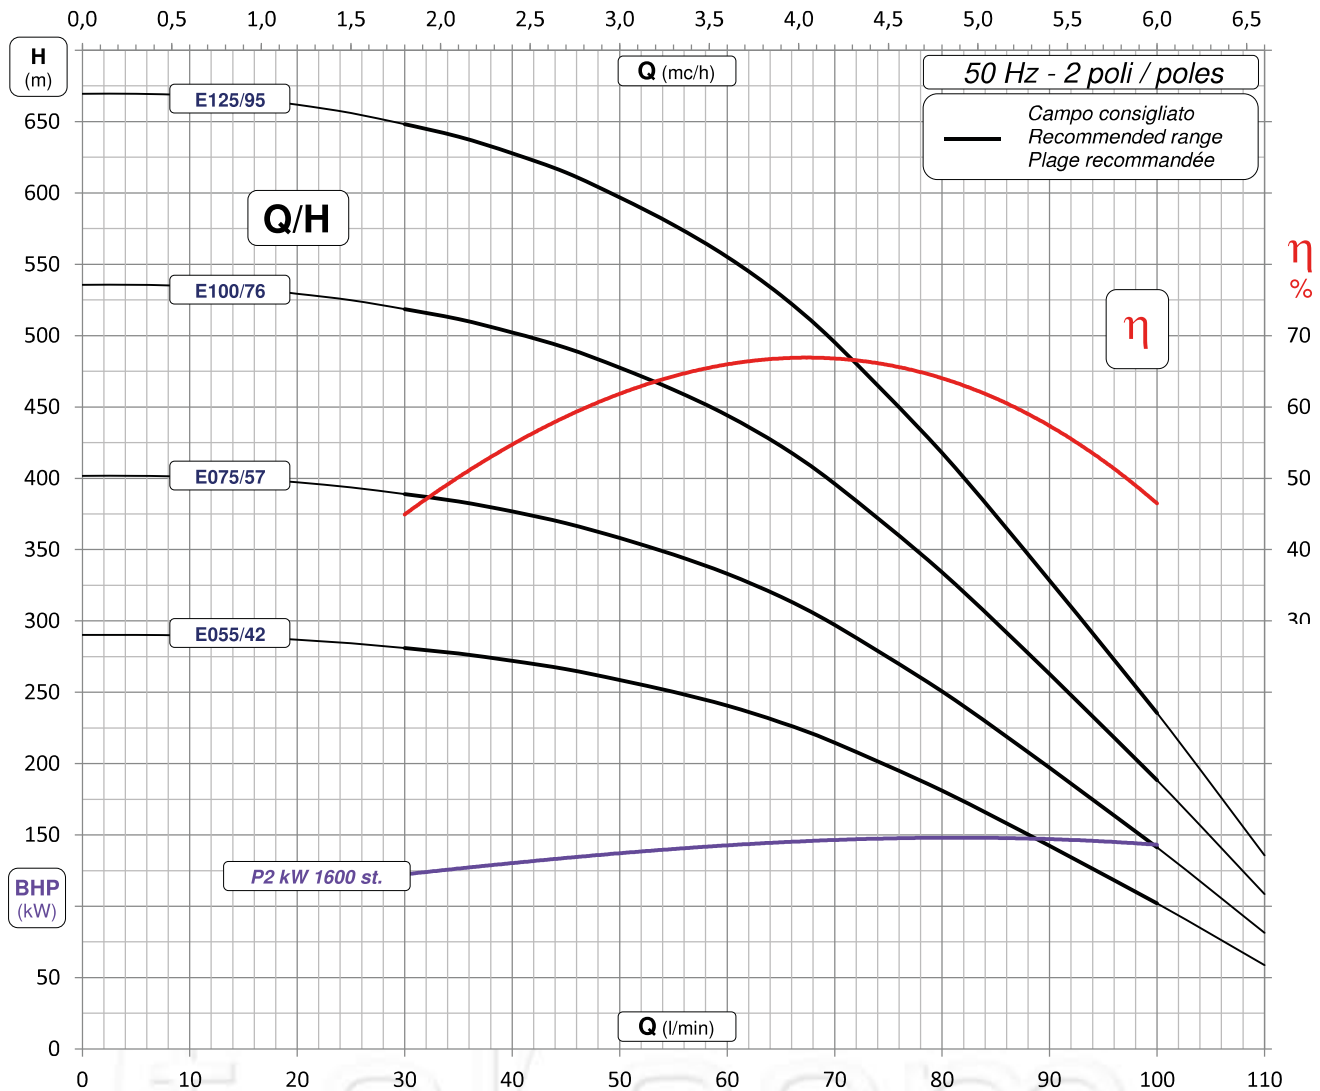

DATI OPERATIVI / OPERATING DATA / DONNEES D'EXPLOITATION														
TIPO / TYPE	P2		ST	L (mm)	Kg	N	con / with FMO4 M				con / with FMO4 T			
	HP	Kw					L1(mm)	Kg	A(230V)	P1(Kw)	L1(mm)	Kg	A(400V)	P1(Kw)
FP4 E055/42	5,5	4	42	1.094	11,0	127	1.894	40,0	25,0	5,48	1.599	26,2	9,2	5,13
FP4 E075/57	7,5	5,5	57	1.458	15,1	134	-	-	-	-	2.048	35,0	12,3	6,88
FP4 E100/76	10	7,5	76	1.912	19,7	138	-	-	-	-	2.712	48,7	16,4	9,38
FP4 E125/95	12,5	9,2	95	2.361	24,4	143	-	-	-	-	3.216	62,3	21,4	11,77

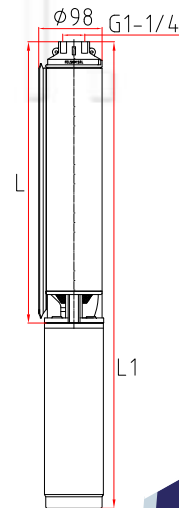

ST = stadi / stages / étages  
 N = spinta idraulica / hydraulic thrust / poussée hydraulique  
 P2= potenza nominale motore / motor nominal power / puissance nominale moteur  
 P1= potenza totale assorbita / total power consumption / consommation totale